

3M6- 250/255/260/265/270

DESERV 3M6 Series consist of PV Modules with power ratings ranging from 250 Wp to 270 Wp. These high performance Multi-Crystalline Silicon Modules are designed for on-grid, as well as off-grid applications.

KEY FEATURES



Made in India



PID resistant



Positive power tolerance

25
YEARS

Limited power output warranty



Highly reliable anti-reflective coated glass

10
YEARS

Product warranty



Windspeed - 2400 Pa

Snowload - 5400 Pa



IP67 Junction box

IEC Certified - 61215, 61730, TS 62804, 61853

IEC 61701 (Salt mist corrosion resistant- Severity 6)

IEC 62716 (Ammonia corrosion resistant)

UL Certified 1703

IEC 60068-2-68 (Sand Abrasion)

Listed in Dewa



1000 V V_{dc}

**Performance under standard test conditions
(1000W/m² AM 1.5, 25°C)**

	DESERV 3M6-250	DESERV 3M6-255	DESERV 3M6-260	DESERV 3M6-265	DESERV 3M6-270
Rated power (Pmax), Wp	250	255	260	265	270
Max power voltage (Vmp), V	30.43	30.62	30.72	30.77	30.95
Max power current (Imp), A	08.22	08.34	08.47	08.63	08.73
Open circuit voltage (Voc), V	38.04	38.28	38.40	38.46	38.70
Short circuit current (Isc), A	08.56	08.69	08.82	08.99	09.12
Module efficiency (%)	15.40	15.71	16.01	16.32	16.63

Operating Conditions

Ambient temperature, °C	-40 to + 85
Maximum system voltage, Vdc	1000
Hail impact velocity, m/sec	23
Maximum surface load capacity, Pascals	5400

Temperature Coefficients

Open circuit voltage	- 0.30 % / °C
Short circuit current	+ 0.05 % / °C
Nominal power	- 0.40 % / °C

Physical Parameters

No. of cells	60
Module dimensions (mm)	1640 X 987 or 990
Module thickness (mm)	40
Approximate weight (kg)	18

Mechanical Characteristics

Cable	NO. 12 AWG, 4mm ² (1.2 m standard)
PV Connectors	MC4/MC4 (Compatible)/TYCO
Frame	Anodized Aluminum Alloy
Junction box	IP67 Junction Box With 4 Rail
Glass	3.2mm Thick Low Iron Tempered (4 mm available on request)


NOCT - DESERV 3M6	250 Wp	255 Wp	260 Wp	265 Wp	270 Wp
Pmax (W)	186.06	189.78	193.50	197.22	200.94
Voltage Vmax Vmpp (V)	27.83	28.00	28.10	28.14	28.31
Current Imax Impp (A)	6.69	6.79	6.89	7.02	7.11
Open Circuit Voltage Voc (V)	35.37	35.59	35.71	35.76	35.98
Short Circuit Current Isc (A)	6.99	7.10	7.21	7.34	7.45

Registered Office


Unit 4, Stuart 2 Business Park, 4 Hilda Avenue, Hennospark, Centurion, 0046

sales@drivedynamics.co.za | drivedynamics.co.za

60 Cells PV Solar Module Dimensions

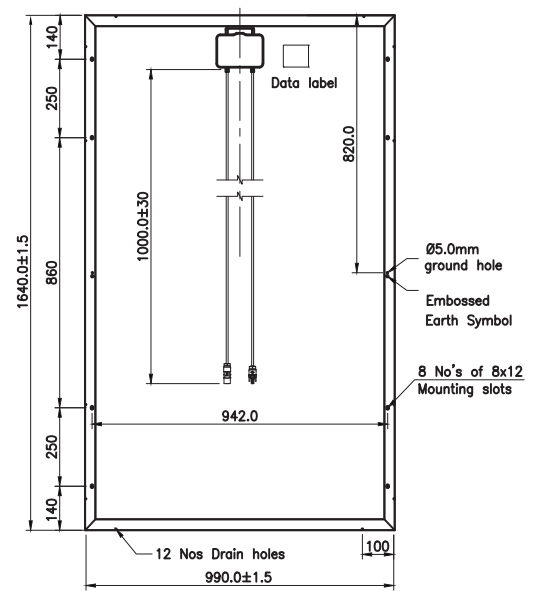

DESERV 3M6 - 270 Wp: PV Module

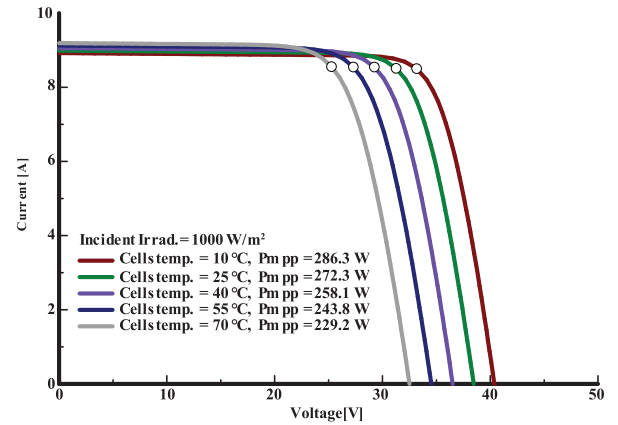

DESERV 3M6 - 270 Wp: PV Module

